



Materials Development Corporation


21541 Nordhoff Street, #B, Chatsworth, CA 91311 - (818) 700-8290 - FAX (818) 700-8304

MDC MICROPOSITIONER MODELS

This Technical Note illustrates various models of probe micropositioners that are used on MDC Probe Stations.



Model 825 Probe Micropositioner

Travel range for each axis is 0.3" (7.6mm). Leadscrew movement is 0.025" (0.64mm) per turn.

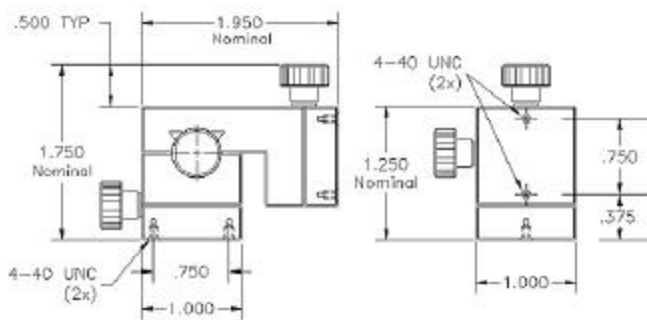

Model 925 Probe Micropositioner

Travel range for each axis is 0.5" (12.5mm). Leadscrew movement is 0.012" (0.32mm) per turn.

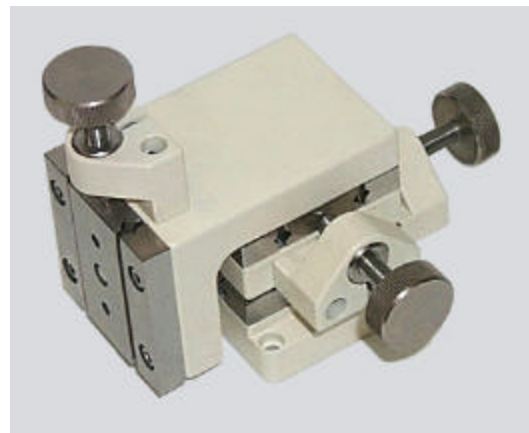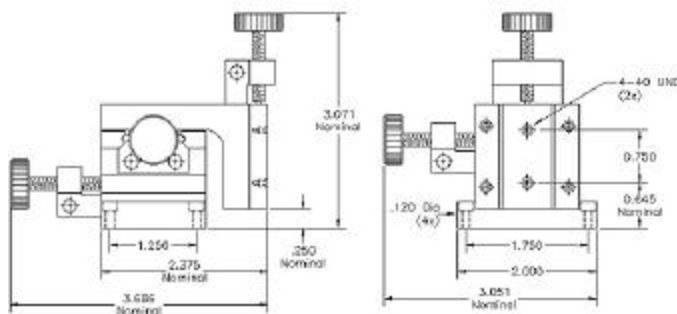

Revised 03/2003